



SMART*toolbox*

Manual

Smart Client Timer Functions

1	General Information.....	2
2	Installation.....	2
3	Configuration of the Smart Client Timer Functions Feature.....	3

1 General Information

MIP (Milestone Integration Platform) plugins and applications are dynamically loaded from the Milestone applications and services, which allows a simple installation and use.

The Smart Client Timer Functions plugin is part of the Smart Toolbox suite, which is running on the Smart Client.

2 Installation

The installation of all the Toolbox Plug-ins are described in the Toolbox Installation Document which is valid for all the Plugins inside the Toolbox.

Please note, that the Smart Client Timer Functions is running on the Smart Client and needs the two Step installation:

→ Server Side Installation

→ Download from Download Manager and Client Side Installation

After the Client-Side installation, the Smart Client Timer Functions is ready for use in the Smart Client.


3 Configuration of the Smart Client Timer Functions Feature

The Smart Client Timer Functions Plugin allows you to create different functions based on timers.


Actually, there are two Timers available:

- Change Views after a certain time with no activity and set selection after Startup
- Restart the Smart Client (or logout) after a certain time with no activity

Open the SmartClient settings window by using the context menu on the top right corner.

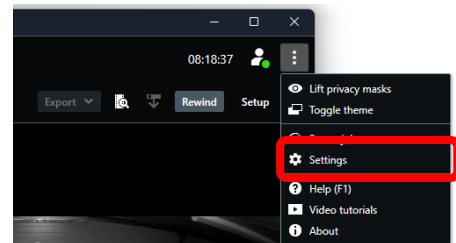

Select *Smart Timer Functions*

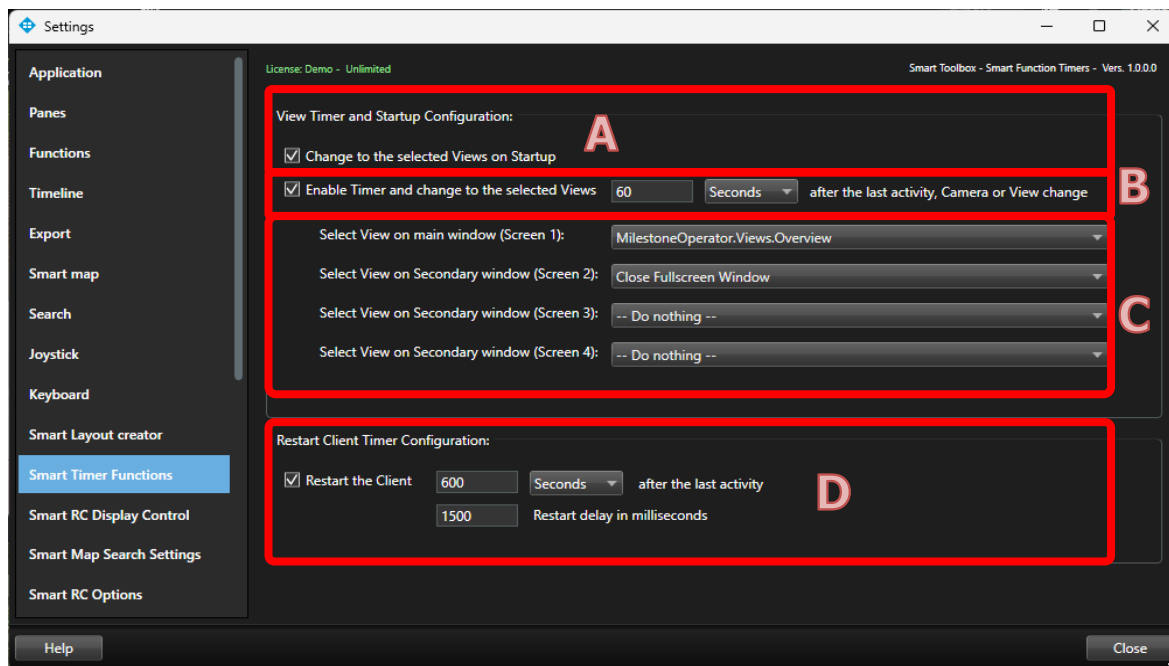

- A** → Enable to set the selected views on startup
- B** → Enable the timer and set time in seconds, minutes or hours.
If enabled the Smart Client will change the selected views on the windows after the configured time. The timer is resettled when any Action occurs. An Action can be a mouse move (over a Client Window) or a Camera or View change in case the Smart Client is remote controlled.
- C** → Select the View to set for Screen one to four. Please note, that the main Window should be on the Primary Screen 1. On the Secondary Screens you can also select to "Close Fullscreen Window".
- D** → Enable the timer to restart the Client and set time in seconds, minutes or hours.
If enabled, the Smart Client will restart after the configured time. The timer is resettled when any Action occurs. An Action can be a mouse move (over a Client Window) or a Camera or View change in case the Smart Client is remote controlled.

NOTE: The Settings are stored on the local machine for the logged in Windows user

Contact:

EET (Schweiz) GmbH
Bösch 108
CH-6331 Hünenberg
Switzerland
Phone: +41 41 785 13 13

Mail: security@eetgroup.ch
Web: <https://smart.eetsecurity.ch>